

Casambi Ready Dimming Module Set Up and User Instructions


For complete technical information on [Casambi BLE](#) and the [Casambi App](#), refer to the Casambi support site - <https://support.casambi.com/> - under “Knowledge base” and “Casambi App User Guide”- “Full user guide”.

The below are simplified instructions to setup and operate GRE Alpha’s Casambi BLE dimming and control modules. If there are any discrepancies, please refer to the Casambi App User Guide:

If you are not already connected to a Casambi network, select “Add to...” or “Add individually to...” (Note: Default profile is Dual Channel Output)


If you are not already connected to a Casambi network, select “Add to...” or “Add individually to...” (Note: Default profile is Dual Channel Output on SLD-DIM-CB2/SLD-DIM-CB2-UL)

Choose your network and select “Evolution”.

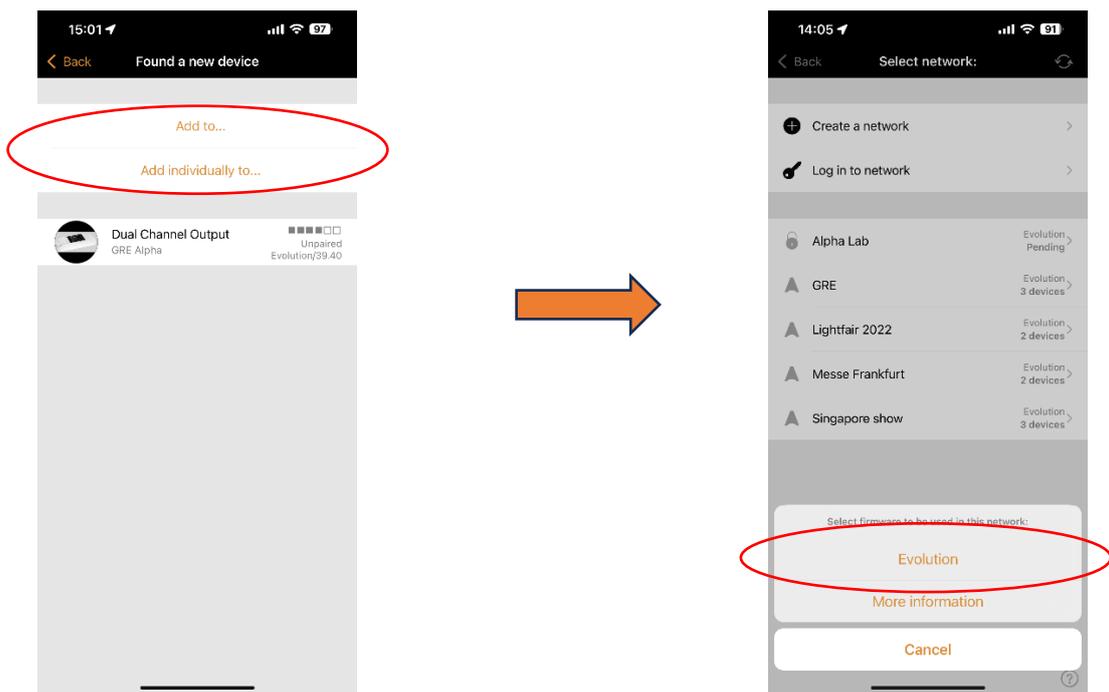


If you do not have a previous created network, please follow the instructions on the Casambi support website on creating a network - [Create a network : Casambi Support](#)

After the device is added, it will show in the Luminaires tab in your Casambi network.

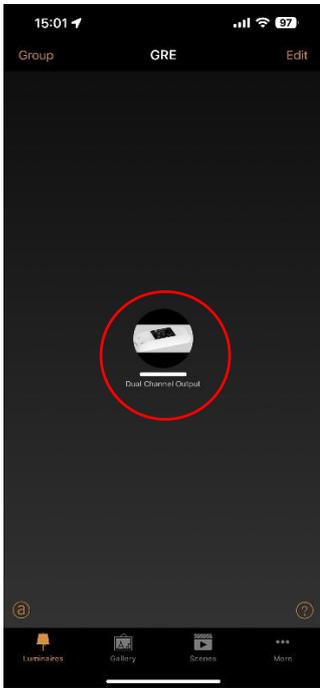



To control the device, press and hold on the device's icon:

Press and hold

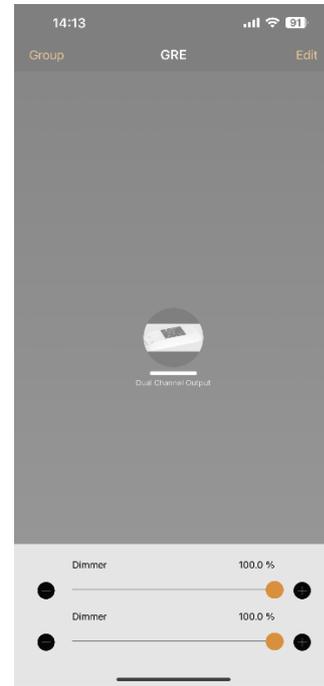


To change to profiles (i.e. other dimming method - Dim to Warm or Tunable White), first unpair the device.

To unpair a device, either press "Edit" in the "Luminaires" tab and then select the cross "X" icon to unpair the device,

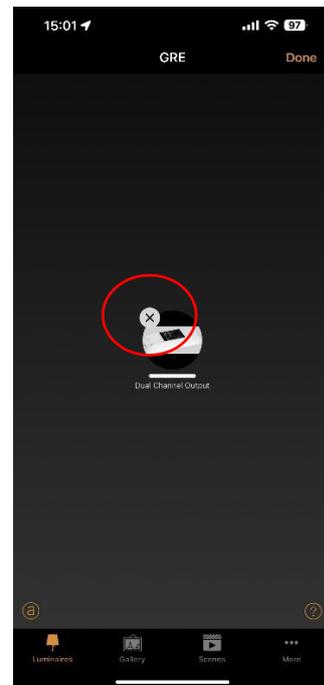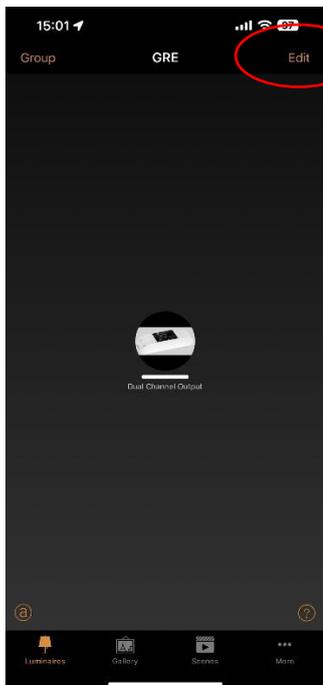


Or go to “More”, select “Nearby devices”, press on the device, then select “Unpair device”.


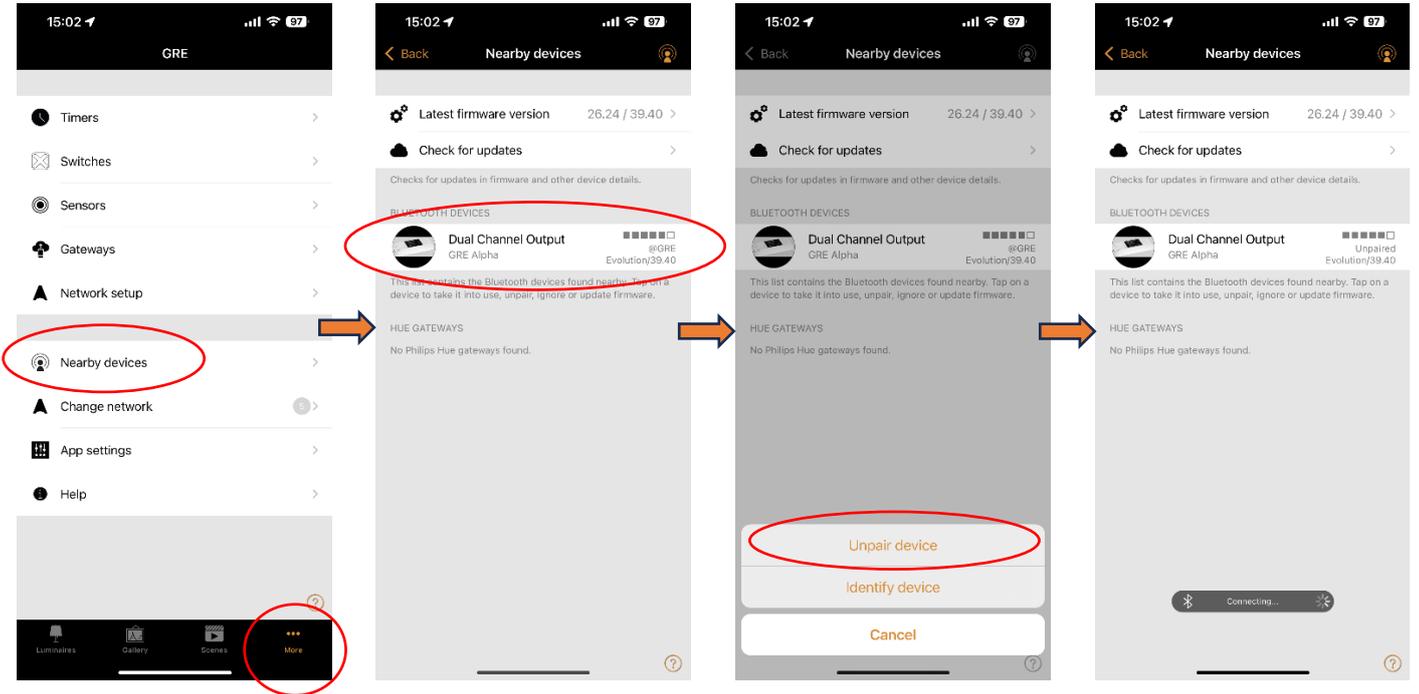


To change to other profiles (e.g. other dimming modes), press on the device (device must be in “Unpaired” status), then select “Change profile”.


Select the other profiles in the list, e.g. Dim to Warm:

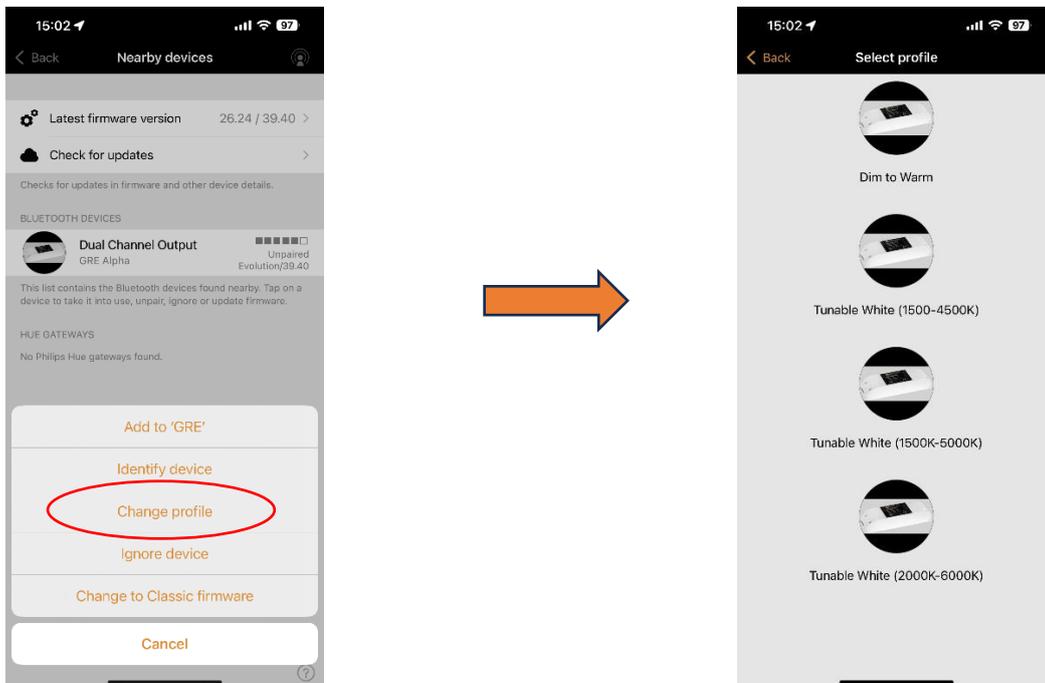


Press “Start update” and wait until the “Update succeeded” screen is shown.

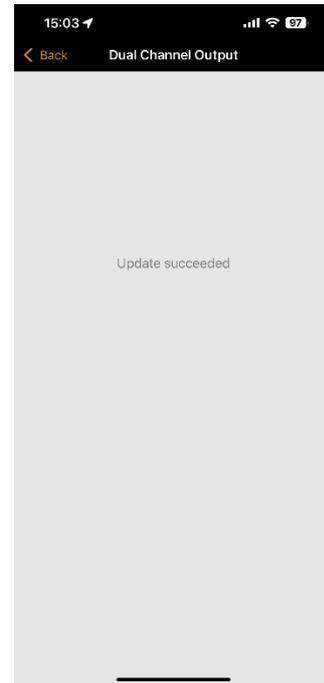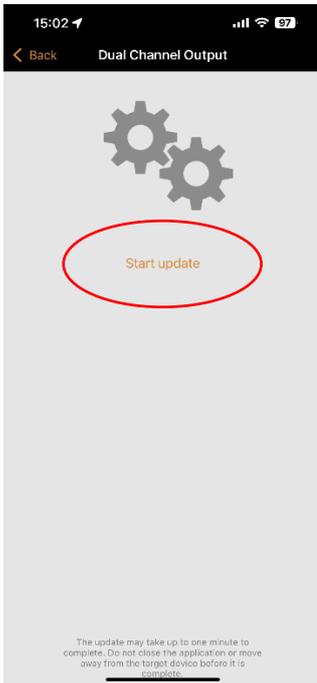


Press “Back”, the profile is now changed.

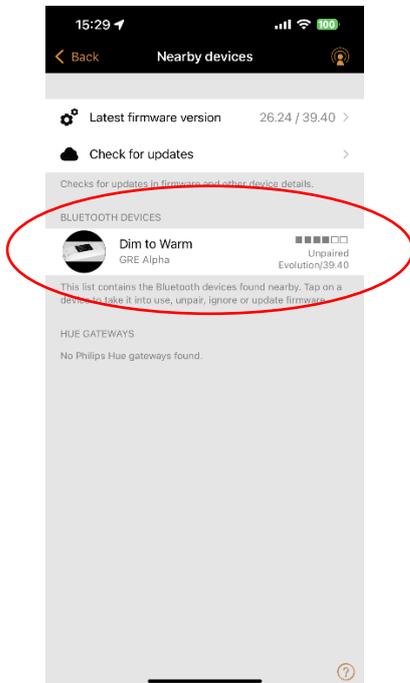

Press on the device and select “Add to...” to add it back to the network.

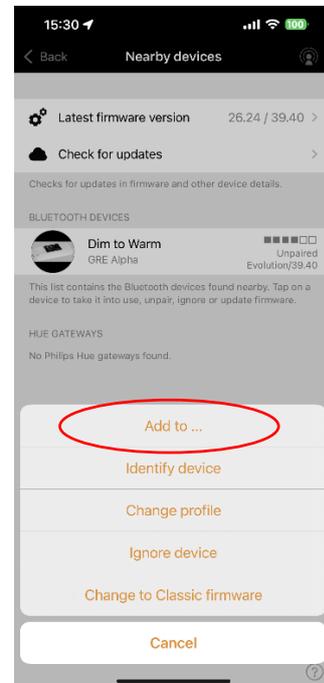

The device with different profiles is now showing in the Luminaires tab in your Casambi network and can be controlled by press and hold on the device's icon.

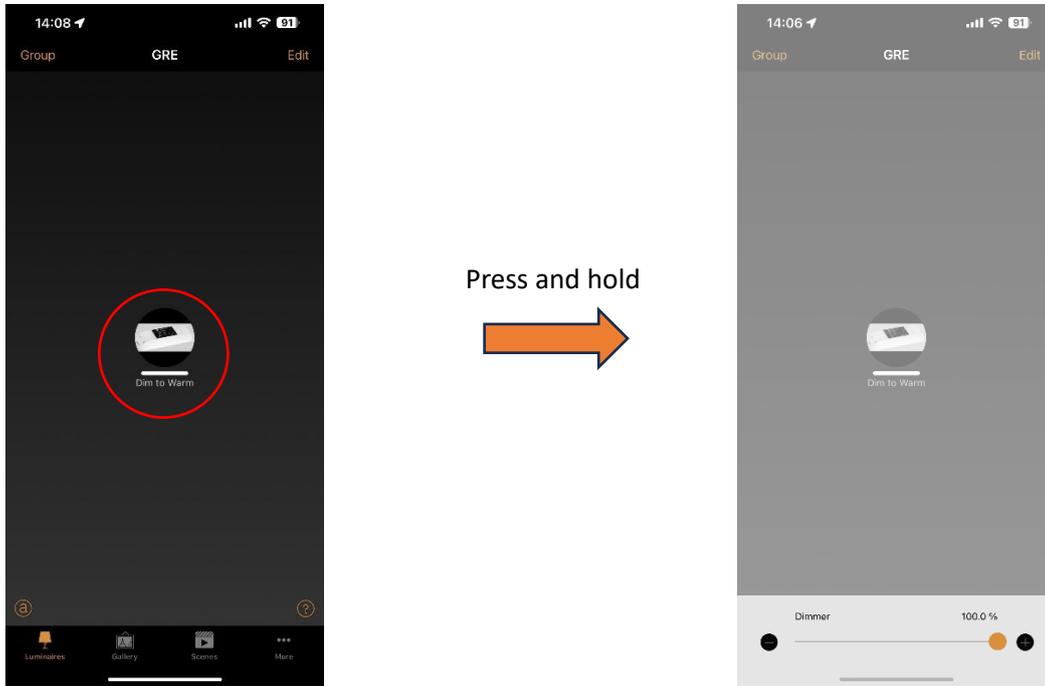

Repeat the above steps to change to Tunable White control.

